


# Voltage Controlled Attenuators

## VCVA-28

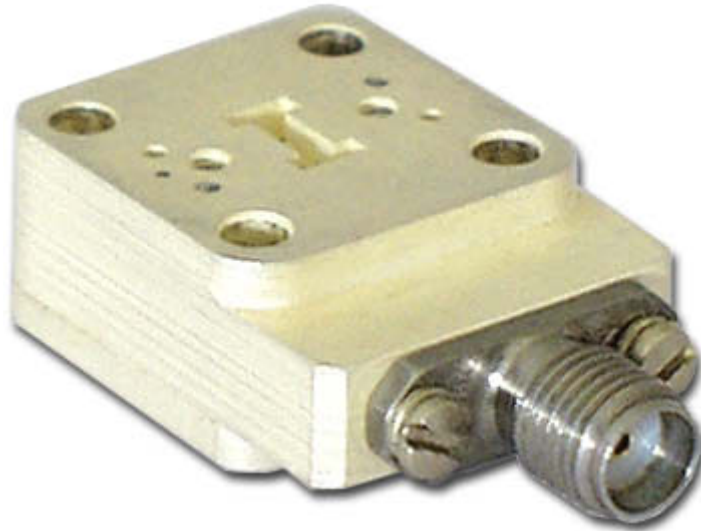

### Specifications:

Frequency Band and Range,	26.5-40 GHz
Bandwidth %:	100
Ins.loss dB:	1.6
Isolation dB (min):	50
Power Handling (peak):	1.0
Switching time mksec:	50
DC max mA:	100
Size, mm:	20x35x10
Flanges:	UG-599/U

